



SOLID CARBIDE SPIRAL CUTTERS RADIUS STYLE Z=2

ART. T175



- Suitable for working plastic materials
- Right-hand rotation with "UP CUT SPIRAL"


RH rotation	D	R	B	L	Z
T175.030.R NEW	3	1,5	12	50	2
T175.040.R NEW	4	2	12	50	2
T175.060.R NEW	6	3	22	60	2
T175.080.R NEW	8	4	22	80	2
T175.100.R NEW	10	5	35	80	2
T175.120.R NEW	12	6	35	80	2
T175.160.R NEW	16	8	55	100	2
T175.180.R NEW	18	9	55	100	2
T175.200.R NEW	20	10	55	100	2

Router bits with diameter from 12 mm, are produced with shank for Seeger retaining rings



HS ROUTER BITS FOR "HUNDEGGER" MACHINES

ART. T244

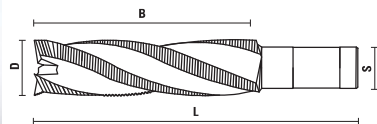


- Chip-breaker execution
- For machining lamellar beams

RH rotation	D	B	L	S	Z
T244.400.R	40	165	235	30	3
T244.500.R	50	215	295	30	3

HS CARVING BITS, PLANE STYLE


ART. T213 - T214



RH rotation	LH rotation	D	L	S	Z
T213.020.R	T213.020.L	2	90	11x50	1
T213.040.R	T213.040.L	4	90	11x50	1
T213.060.R	T213.060.L	6	90	11x50	1
T213.080.R	T213.080.L	8	90	11x50	1
T213.100.R	T213.100.L	10	90	11x50	1
T213.120.R	T213.120.L	12	90	11x50	1
T213.140.R	T213.140.L	14	90	11x50	1
T213.160.R	T213.160.L	16	90	11x50	1
T214.100.R	T214.100.L	10	90	11x50	2
T214.120.R	T214.120.L	12	90	11x50	2
T214.140.R	T214.140.L	14	90	11x50	2
T214.160.R	T214.160.L	16	90	11x50	2
T214.180.R	T214.180.L	18	90	11x50	2
T214.200.R	T214.200.L	20	90	11x50	2
T214.220.R	T214.220.L	22	90	11x50	2
T214.240.R	T214.240.L	24	90	11x50	2

HS CARVING BITS, ROUND STYLE

ART. T215 - T216



RH rotation	LH rotation	D	L	S	Z
T215.020.R	T215.020.L	2	90	11x50	1
T215.040.R	T215.040.L	4	90	11x50	1
T215.060.R	T215.060.L	6	90	11x50	1
T215.080.R	T215.080.L	8	90	11x50	1
T215.100.R	T215.100.L	10	90	11x50	1
T215.120.R	T215.120.L	12	90	11x50	1
T215.140.R	T215.140.L	14	90	11x50	1
T215.160.R	T215.160.L	16	90	11x50	1
T216.100.R	T216.100.L	10	90	11x50	2
T216.120.R	T216.120.L	12	90	11x50	2
T216.140.R	T216.140.L	14	90	11x50	2
T216.160.R	T216.160.L	16	90	11x50	2
T216.180.R	T216.180.L	18	90	11x50	2
T216.200.R	T216.200.L	20	90	11x50	2
T216.220.R	T216.220.L	22	90	11x50	2
T216.240.R	T216.240.L	24	90	11x50	2